



User Manual



F© (€

FMPHB-21

8U 1080p High Bright Rackmount Panel



Options Available:

- SDI / MCS
- BNC / HDMI / Audio
- Touch-Screen / DC Power
- MIL-Type or Lockable Connector

Designed/Manufactured by Austin Hughes and Distributed by Eclipse Rackmount, Inc.

Legal Information

First English printing, October 2002

Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. We are not liable for any injury or loss that results from the use of this equipment.

Safety Instructions

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

- Unplug equipment before cleaning. Don't use liquid or spray detergent; use a moist cloth.
- Keep equipment away from excessive humidity and heat. Preferably, keep it in an air-conditioned environment with temperatures not exceeding 40° Celsius (104° Fahrenheit).
- When installing, place the equipment on a sturdy, level surface to prevent it from accidentally falling and causing damage to other equipment or injury to persons nearby.
- When the equipment is in an open position, do not cover, block or in any way obstruct the gap between it and the power supply. Proper air convection is necessary to keep it from overheating.
- Arrange the equipment's power cord in such a way that others won't trip or fall over it.
- If you are using a power cord that didn't ship with the equipment, ensure that it is rated for the voltage and current labeled on the equipment's electrical ratings label. The voltage rating on the cord should be higher than the one listed on the equipment's ratings label.
- Observe all precautions and warnings attached to the equipment.
- If you don't intend on using the equipment for a long time, disconnect it from the power outlet to prevent being damaged by transient over-voltage.
- Keep all liquids away from the equipment to minimize the risk of accidental spillage. Liquid spilled on to the power supply or on other hardware may cause damage, fire or electrical shock.
- Only qualified service personnel should open the chassis. Opening it yourself could damage the equipment and invalidate its warranty.
- If any part of the equipment becomes damaged or stops functioning, have it checked by qualified service personnel.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:

Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or
failure to follow instructions supplied with the product.
Repair or attempted repair by anyone not authorized by us.
Any damage of the product due to shipment.
Removal or installation of the product.
Causes external to the product, such as electric power fluctuation or failure.

- Use of supplies or parts not meeting our specifications.Normal wear and tear.
- ☐ Any other causes which does not relate to a product defect.
 Removal, installation, and set-up service charges.

Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-position or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Contents

< Part. 1 >	FMPHB-21	
1.1 1.2 1.3	Package Contents Structure Diagram & Dimensions Installation	P.1 P.1 - 2 P.3 - 4
Part. 2 >	Specifications / OSD / Remote Controller	
2.1 2.2	Product Specifications On-Screen Display Operation (OSD)	P.5 - 6 P.7 - 8
2.3	Picture In Picture (PIP) / Picture By Picture (PBP)	P.9 - 10
< Part. 3 >	Options	
3.1	3G / HD / SD-SDI Broadcast-grade input	P.11
3.2	MCS Multi-Display Control Solution	P.12
3.3	AV3.0 Upgrade : DVI-D + VGA + HDMI + BNC + S-Video + Audio	P.13
3.4	21" Touch-Screen: Resistive, Capacitive, Multi-touch	P.14
3.5	48V, 24V or 12VDC power	P.15
3.6	MIL-Type or Lockable Connector	P.16

Before Installation

- It is very important to mount the equipment in a suitable cabinet or on a stable surface.
- Make sure the place has a good ventilation, is out of direct sunlight, away from sources of excessive dust, dirt, heat, water, moisture and vibration.

Unpacking

The equipment comes with the standard parts shown in package content. Check and make sure they are included and in good condition. If anything is missing, or damaged, contact the supplier immediately.

How To Clean Your LCD Monitor



Caution :

- To avoid the risk of electric shock, make sure your hands are dry before unplugging your monitor from or plugging your monitor into an electrical outlet.
- When you clean your monitor, do not press down on the LCD screen. Pressing down on the screen can scratch or damage your display. Pressure damage is not covered under warranty.
- Use only cleansers made specifically for cleaning monitors and monitor screens. Cleansers not made to clean monitors and monitor screens can scratch the LCD display or strip off the finish.
- Do not spray any kind of liquid directly onto the screen or case of your monitor. Spraying liquids directly onto the screen or case can cause damage which is not covered under warranty.
- Do not use paper towels or abrasive pads to clean your monitor. Using an abrasive pad or any wood based paper product such as paper towels can scratch your LCD screen.

Cleaning Your Monitor

To clean your LCD safely, please follow these steps:

- ① Disconnect the power cord.
- ② Gently wipe the surface using a clean, dry microfiber cloth. Use as little pressure as possible.

Cleaning Tough Marks and Smudges

To remove tough marks and smudges, please follow these steps:


- ① Disconnect the power cord.
- ② Spray a small amount of non-abrasive cleanser on a microfiber cloth.
- Caution: Do not spray or apply any liquids directly onto the monitor. Always apply the solution to your microfiber cloth first, not directly on the parts you are cleaning.
- Gently wipe the surface. Use as little pressure as possible.
- Wait until your monitor is completely dry before plugging it in and powering it up.



FMPHB-21 unit X 1


- 6ft VGA cable X 1
- Power adapter X 1
- Power cord X 1
- Fastener screw for rear bracket x 2


< 1.2 > Structure Diagram

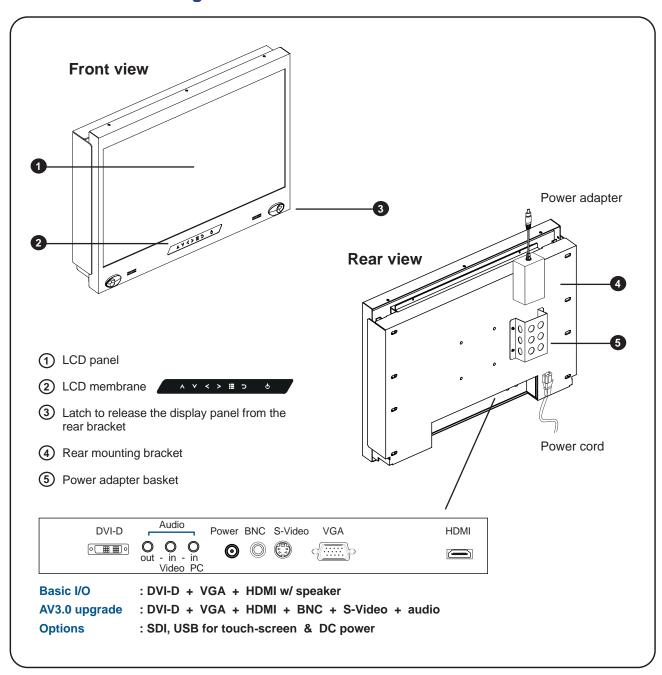

< 1.2 > Dimensions


Front View

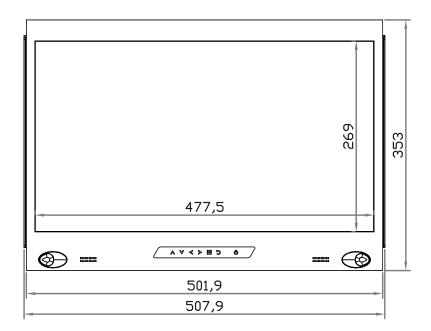

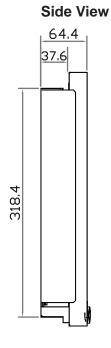


 $\begin{array}{l} UNIT:mm\\ 1mm=0.03937\ inch \end{array}$


Rear View

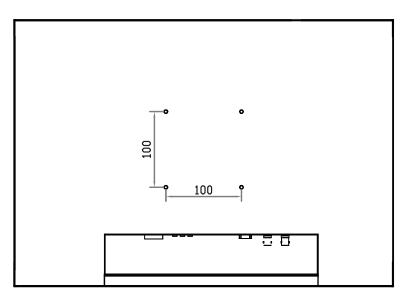


Bottom View



Model	Product Dimension	Packing Dimension	Net	Gross
	(W x D x H)	(W x D x H)	Weight	Weight
FMPHB-21	501.9 x 64 x 353 mm	555 x 124 x 537 mm	7.5 kg	10 kg
	19.8 x 2.5 x 13.9"	21.9 x 4.9 x 21.1"	16.5 lb	22 lb

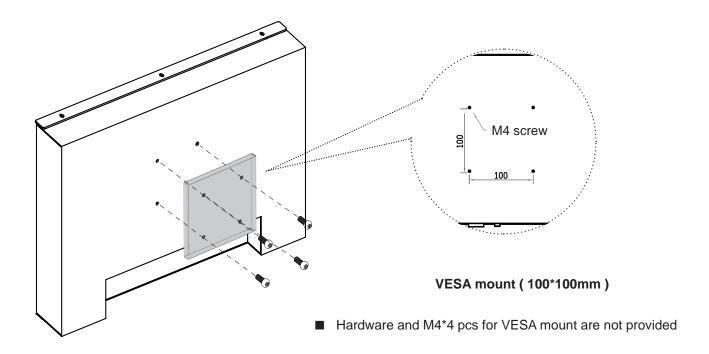


< 1.3 > Rear Mounting Bracket Installation

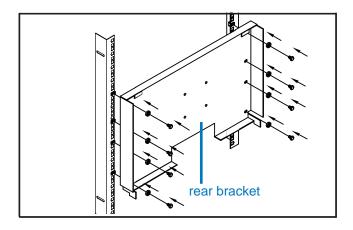

Step 1


- Mount the rear bracket with M6 screw set.
- 8 x M6 screw set are required.

M6 screw sets are not provided.

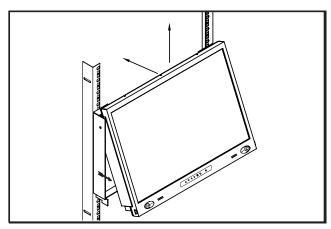


Step 2

■ Insert the upper part of the FMPHB-21 display panel into the rear bracket.

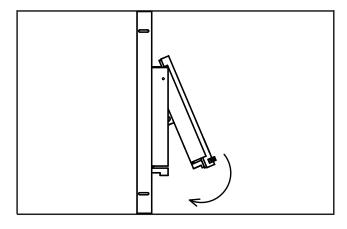

Step 3

■ Push the lower part of the FMPHB-21 display panel into the rear bracket.

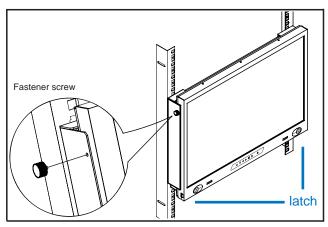

Step 4

- Fix the FMPHB-21 display panel into the rear bracket with two fasteners (Left & right side).
- Lock the FMPHB-21 display panel by the latch (on the bottom left & right side).

FMPHB-21

LCD	Panel Size (diagonal)	21.5-inch Widescreen TFT color LCD
Panel	Display pixel (dots x lines)	1920 x 1080
	Brightness (typ.)	1000
	Contrast Ratio (typ.)	5000:1
	Color	16.7 M
	Viewing Angle (L/R/U/D)	89/89/89
	Response Time (ms)	16
	Dot pitch (mm)	0.248
	Display Area (mm)	476.64H x 268.11V
	Surface treatment	Anti-glare
	Surface hardness	3H
	Backlight Type	LED
	MTBF (hrs)	50,000

Video	Digital	HDMI	HDMI 1.1, CEA-861-D
Connectivity		DVI	DVI-D, TMDS single link
	Analog	VGA	Analog 0.7Vp-p
		Composite (RCA)	NTSC & PAL
		S-Video (4-pin)	NTSC & PAL
	Plug & Play	DVI / VGA	VESA EDID structure 1.3
	Synchronization	VGA	Separate, Composite & SOG

Audio	Audio Input	Connector	3.5mm stereo jack
Connectivity		Impedance / Power level	30kΩ / 750mV
	Audio Output	Connector	3.5mm stereo jack
		Resistance / Power level	30kΩ / 2.8V
	Speaker Output	Power	2 x 2W

^{*}When the audio output is connected, speaker output is OFF

Power	Power Supply	Range	Auto-sensing 100 to 240VAC, 50 / 60Hz
	Power Consumption	Screen display ON	65W or less
		Power saving mode	6W or less
		Power button OFF	2W or less

Regulatory Safety Approval	FCC & CE
----------------------------	----------

Environmental	Operating	Temperature	0 to 50°C degree
Conditions		Humidity	20~90%, non-condensing
	Storage	Temperature	-5 to 60°C degree
		Humidity	5~90%, non-condensing
		Shock	10G acceleration (11ms duration)
		Vibration	5~500Hz 1G RMS random

Physical	Product (WxDxH)	501.9 x 64 x 353 mm
Specification		19.8 x 2.5 x 13.9 inch
	Packing (WxDxH)	555 x 124 x 537 mm
		21.9 x 4.9 x 21.1 inch
	Net Weight	7.5 kgs / 16.5 lbs
	Gross Weight	10 kgs / 22 lbs

Amultantile	D)/I D /) / O A I = = 1	DO 0'I	4000 4000 0011
Applicable	DVI-D / VGA Input	PC Signal	1920 x 1080 x 60Hz
Format			1360 x 768 x 60Hz
			1280 x 1024 x 60 / 75Hz
			1280 x 960 x 60Hz
			1280 x 768 x 60 / 75Hz
			1152 x 864 x 75Hz
			1024 x 768 x 60 / 70 / 75Hz
			848 x 480 x 60Hz
			800 x 600 x 60 / 72 / 75Hz
			720 x 400 x 70Hz
			640 x 480 x 60 / 72 / 75Hz
			640 x 400 x 70Hz
			640 x 350 x 70Hz
	HDMI Input	PC Signal	Same as VGA
		Video Signal	1080p : 50 / 60Hz
			1080i : 50 / 60Hz
			720p : 50 / 60Hz
			480p : 60Hz
			576p : 50Hz
		Audio Signal	2ch Linear PCM (32 / 44.1 / 48 KHz)



Membrane Switch	Function
٨	Turn the monitor on or off
	Display the OSD menu Act as an Enter key to select screen setting options
$\wedge $	Scroll through menu options and adjust the displayed control
\bigcirc	Exit the OSD screen Go back to the previous on-screen sub-menu or main menu

Remark : All LED touch buttons in WHITE light.

The LED of **Power** (b) touch button will flash continuously when there is no signal input.

1 All the LED touch buttons will automatically turn off after 10 minutes of idle status (except the **Power** (b)).

(2) Light up all membrane buttons, please press any button for 1 - 2 seconds (except the **Power** (1)).

Picture

Standard / Vivid / Soft / User mode to choose Picture mode:

Brightness: Adjust background black level of the screen image

Contrast: Adjust the difference between the image background

(black level) and the foreground (white level)


Hue: Adjust the screen hue value

Saturation: Adjust the saturation of the image color

Picture size: Adjust the image size

Color temp: Standard / Cool / Warm / User to choose

Noise reduce : Reduce the noise of the image Sharpness: Adjust the image from weak to sharp

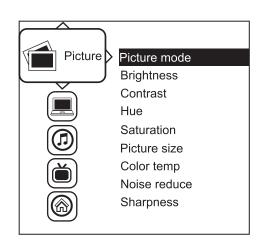

< 2.2 > On-Screen Display Operation (OSD)

2 PC


Auto adjust: Automatically adjust sizes, centers and fine tunes the

video signal to eliminate waviness and distortion.

Clock : Adjust the clock value

Phase : Adjust the phase value

H. Position : Align the screen image left or rightV. Position : Align the screen image up or down

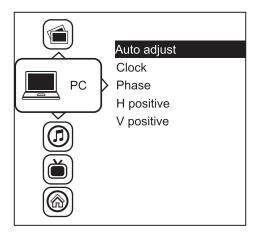

3 Audio

Audio mode: Movie / Voice / Normal / Music mode to choose

Volume : Adjust the volume of sound


Bass : Set the value of bass sound

Treble : Set the value of treble sound

Balance: Set the balance value of treble and bass sound

Analog TV audio: Set the value of analog TV audio sound

Mute: Turn off the surrounding sound

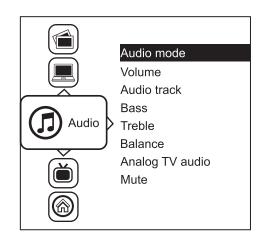

4 MISC

Language : Select the language in which the OSD menu is

displayed - English


Sleep timer: Set the off time

PIP mode: Adjust picture in picture setting

PIP position : Enter into PIP position

PIP source : Enter into the Sub source and sound source System reset : Return the adjustment back to factory setting

Information: Select for Help

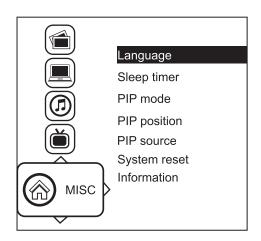


< 2.3 > How to Use Picture In Picture (PIP) / Picture By Picture (PBP)

< 2.3.1 > Picture in Picture (PIP)

Mode


Display the Sub screen in the Main screen. OSD Menu \to MISC \to PIP Mode \to Large / Small / OFF



Position

Adjust the position of the Sub screen (top left, bottom left, top right, bottom right)

OSD Menu \rightarrow MISC \rightarrow PIP Position \rightarrow top left / top right / bottom left / bottom right

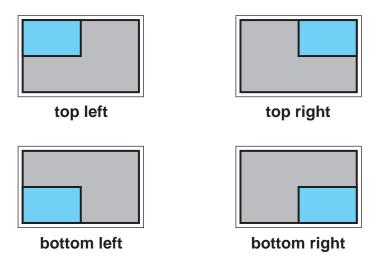

Size

Adjust the size of the Sub screen (Large / Small) OSD Menu \rightarrow MISC \rightarrow PIP Mode \rightarrow Large / Small

Size of Sub screen

LCD Monitor	Larga Sub saraan	Small Sub screen
LCD MOUNTO	Large Sub screen	Siliali Sub Screeli
1920 x 1200	552 x 414	480 x 360
1920 x 1080	552 x 414	480 x 360
1440 x 900	414 x 310	360 x 270
1366 x 768	392 x 294	340 x 254
1280 x 1024	368 x 276	320 x 240

< 2.3.2 > Picture By Picture (PBP)

Mode

Display the Sub screen next to the Main screen. OSD Menu \rightarrow MISC \rightarrow PIP Mode \rightarrow PBP



Size

LCD Monitor	Main / Sub screen
1920 x 1200	955 x 716
1920 x 1080	955 x 716
1440 x 900	715 x 536
1366 x 768	678 x 508
1280 x 1024	635 x 476

< 2.3.3 > PIP / PBP Source

To select an input signal for PIP / PBP Sub screen.

 $\mathsf{OSD}\;\mathsf{Menu}\;\rightarrow\;\mathsf{MISC}\;\rightarrow\;\mathsf{PIP}\;\mathsf{Source}\;\rightarrow\;\mathsf{VGA}\;\;/\;\;\mathsf{S-Video}\;\;/\;\;\mathsf{Composite}\;\;/\;\;\mathsf{DVI}\;\;/\;\;\mathsf{HDMI}\;\;/\;\;\mathsf{SDI}\;\;/\;\;\mathsf{YPbPr}\;\;/\;\;\mathsf{TV}$

The PIP / PBP is operable in the following table :

Sub Main	VGA	S-Video	Composite	DVI-D	HDMI	SDI	YPbPr	TV
VGA	Х	0	0	0	0	0	0	0
S-Video	0	х	Х	0	О	0	0	Х
Composite	0	х	Х	0	О	0	0	х
DVI	0	О	0	Х	х	0	0	0
HDMI	0	О	0	Х	Х	0	0	0
SDI	0	О	0	0	0	Х	Х	0
YPbPr	0	О	0	0	О	Х	Х	0
TV	0	х	х	0	О	0	0	х


< 3.1 > Options : 3G / HD / SD-SDI input



The SDI input is an ideal solution for the broadcastgrade video and high resolution CCTV market.

Designed for use with CyberView Full HD 1080p and ultra high resolution 1920 x 1200 LCD displays, the board provides a SDI input module without using additional space or power and it comes standard with a 2-year warranty.

SDI



*** For **SDI** option, the AD board will be upgraded to AV3.0, and this comes standard with HDMI, DVI-D, VGA, S-Video, BNC and audio inputs.

INPUT	3G-SDI IN	BNC x 1 / 0.8Vp-p (75 ohm)
	3G-SDI OUT	BNC x 1 / Active through, equalized & relocked

Standard Compliance	Video	SMPTE 425M / 274M / 296M / 125M ITU-R BT.656	
	Audio	SMPTE 299M / 272M-C	

Compatible Video Format	3G-SDI	1080p 1080p 1080i 720p	@60 / 50Hz, 4:2:2 @30 / 25 / 24Hz, 4:4:4 @60 / 50Hz, 4:4:4 @60 / 50Hz, 4:4:4
	HD-SDI	1080p 1080i 720p	@30 / 25 / 24Hz, 4:2:2 @60 / 50Hz, 4:2:2 @60 / 50Hz, 4:2:2
	SD-SDI	480i	@60Hz, 4:2:2
	ITU-R BT.656	576i	@50Hz, 4:2:2

Compatible Audio Format	3G-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video
	HD-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video
	SD-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized /
		Asynchronized Video

Max. Transmission Distance	3G-SDI	150m at 2.97Gb/s
75 ohm coaxial cable	HD-SDI	250m at 1.485Gb/s
	SD-SDI	480m at 270Mb/s


< 3.2 > Options : MCS (Multi-Display Control)



The MCS solution is able to control the OSD of various CyberView LCD displays up to 64 units..


The RS-232C is used for the communication between the PC and first display via a 15' serial cable, while the CAN bus is used for the LCD displays. They may be cascaded together via Cat 5/6 and daisy chained up to 1,000 meters

Specifically designed for our displays, the MCS input module saves additional space/power and is covered by the 2-year standard warranty.

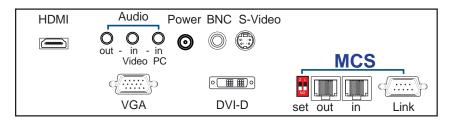

*** For additional information and specs on MCS, please contact your supplier.

*** For **MCS** option, casing depth will be changed.

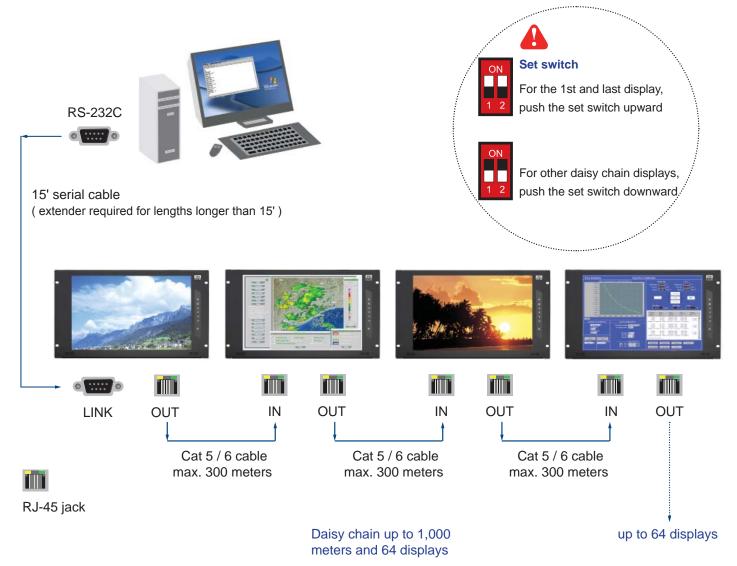

- BNC (S-Video + Composite, BNC)
- Audio (3.5mm audio jacks for audio in & out, and 2W + 2W speakers)






21.5" USB Touch-Screen Specification

Model	TRB e-Resistive	TCB e-Capacitive	TMC2 Multi-touch
Technology	5-Wire Resistive	Capacitive	Projected Capacitive
Touch Point	Single	Single	Dual
Method	Stylus or Finger	Finger	Finger
Activation Force	≤ 50g / Stylus=R0.8	≤ 50g	≤ 50g
Durability	10 million touches	300 million touches	100 million touches
Response Time	15 ms	20 ms	20 ms
Optical Transmittance	80% ± 3%	87% ±2%	90% ±2%
Surface Hardness	3H	9H	7H
Haze	8% ± 3%	7%	3%
Glass	3.2 ±0.2 mm	2.8 mm ±10%	2.4 ±0.15 mm
Connector	USB ⁻	Гуре А	USB Type A
Compatibility	Windows 7 / X	P / Vista, Linux	Windows 7

- USB touch-screen package includes 1 x 6ft USB cable, quick reference guideline and CD disc
- For detailed information, please refer to the attached CD disc
- As the touch-screen unit is not made of toughened glass, please handle it carefully

USB Touch-Screen




TRB & TCB Driver

Please follow the below steps to setup the touch-screen:

- **Step 1.** Run the bundled CD disc or download the driver from the link below : http://www.austin-hughes.com/downloads/RMDL/software.html
- Step 2. Double click the Setup.exe
- Step 3. Follow the installation instruction to finish the setup
- Step 4. After installation, run the TouchKit program & the "4 point calibration"



Please do the initial calibration after the first setup

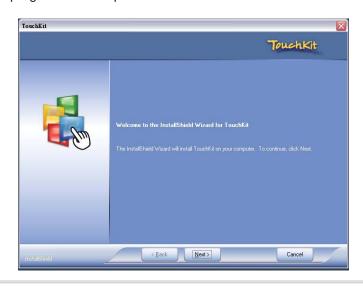

< 3.4 > Options : Touch-Screen & Driver

TMC2 Driver



Connect the USB cable from the USB port on the LCD to a computer. The touch-screen supports easy Plug-and-Play operations. There is no need to install additional drivers on the computer.

< 3.5 > Options : DC Power ○ □ □ ○



Model	24V	48V
Input rating		
Input voltage:	24-Volt	48-Volt
Input range:	18 ~ 36V	36 ~ 75V
Input current		
- No load	50 mA	50 mA
- Full load	4880 mA	2442 mA
Output rating		
Output voltage:	12-Volt	12-Volt
Output current:	8.3A	8.3A
Efficiency	85%	86%

< 3.6 > Options : MIL-Type or Lockable Connector

	Input	Part no.	MIL Standard
MIL - type Connector	DC Power *** (Male)	MS3470W8-33P	MIL - DTL - 26482
	VGA *** (Male)	MS3470W14-15P	MIL - DTL - 26482

^{***} There are several additional MIL DC and VGA connector types with varying design characteristics to meet cost considerations and to provide users with the most design flexibility possible. For more information, please contact your supplier.

	Input	Part no.	Standard
Lockable Connector	DC Power (Male)	YM-Ext-461CP001	D-type 3W3
	USB	LUSB - A111 - 00	-

^{***} MIL - type or Lockable connectors above can be integrated with our LCD displays. Connectors are not available independently.

